



Metrology of sub-micron structured polymer surfaces

Quagliotti, Danilo; Tosello, Guido; Salaga, J.; Baruffi, Federico; Hansen, Hans Nørgaard; Gasparin, Stefania

Publication date:
2016

Document Version
Peer reviewed version

[Link back to DTU Orbit](#)

Citation (APA):
Quagliotti, D., Tosello, G., Salaga, J., Baruffi, F., Hansen, H. N., & Gasparin, S. (2016). *Metrology of sub-micron structured polymer surfaces*. Poster session presented at Polymer Replication on Nanoscale, Windisch, Switzerland.

General rights

Copyright and moral rights for the publications made accessible in the public portal are retained by the authors and/or other copyright owners and it is a condition of accessing publications that users recognise and abide by the legal requirements associated with these rights.

- Users may download and print one copy of any publication from the public portal for the purpose of private study or research.
- You may not further distribute the material or use it for any profit-making activity or commercial gain
- You may freely distribute the URL identifying the publication in the public portal

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

Metrology of sub-micron structured polymer surfaces

D. Quagliotti¹, G. Tosello¹, J. Salaga¹, F. Baruffi^{1,3}, H. N. Hansen¹, S. Gasparin²

¹ Technical University of Denmark, Department of Mechanical Engineering, Kgs. Lyngby, Denmark

² The LEGO Group, Billund, Denmark

³ Politecnico di Milano, Dipartimento di Ingegneria Meccanica, Milano, Italy

Introduction

Precision moulding is an essential technology for the miniaturisation of moulded parts and it is continuously needing for specially developed solutions to face new challenges in injection moulding processes.

One of the key challenges in advanced injection moulding technology is the achievement of a full surface replication of the tool insert component when moulding the polymer melt [1]. This aspect is particularly critical when dealing with increasingly small dimensional scales in micro- and nano-structured surfaces [2, 3].


In this context, a metrological investigation (see Fig. 1) of polymer replicated surfaces using metal masters with different types of finish was carried out.

Four types of surface finish were considered (see Fig. 2): a) Diamond buff polishing. b) Grit paper polishing. c) Stone polishing. d) Dry blast polishing.

Both master and replicated surfaces were measured using a laser scanning confocal microscope. Hence, the replication fidelity was evaluated comparing the measurements of the polymer surfaces against the ones of the masters. The amplitude and the slope replications were considered calculating respectively Sq and Sdq areal surface texture parameters.

Uncertainty evaluation

The uncertainty model was inspired to ISO 15530-3:2011 and adapted to optical measurements.

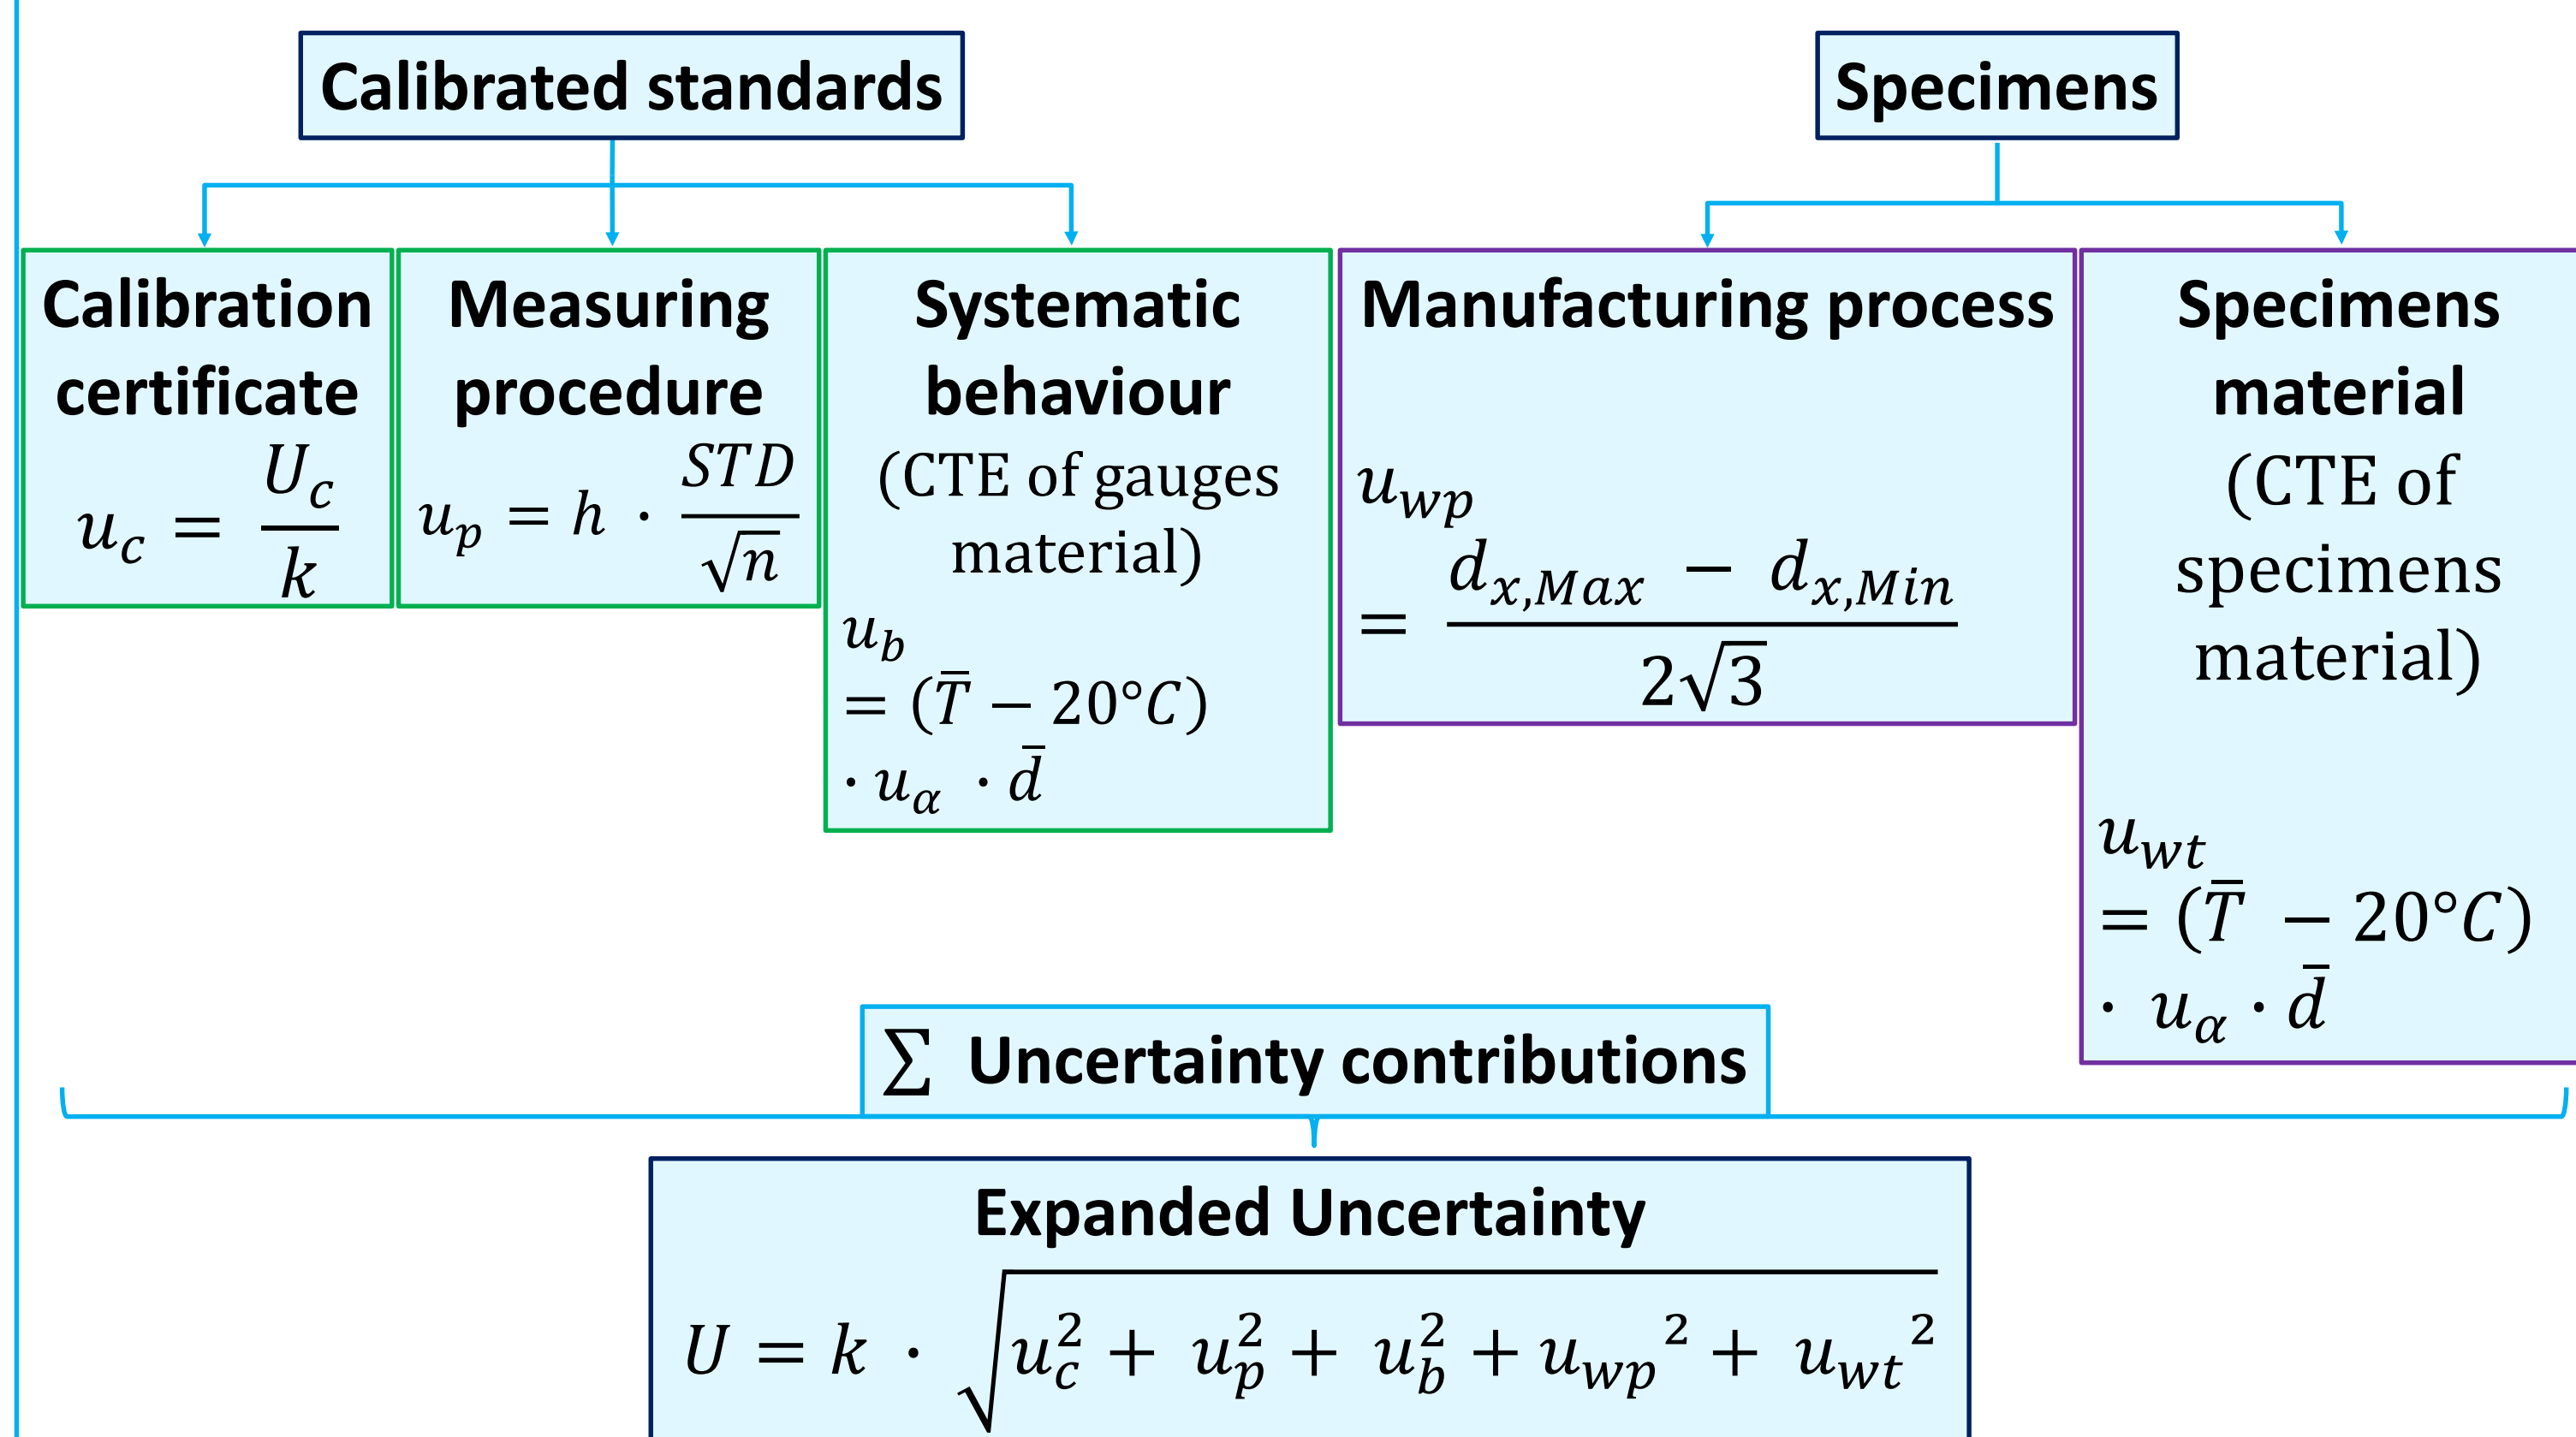

The uncertainty was successively propagated to the replication fidelity ($f_r = Sx_{replica}/Sx_{master}$) according to the formula

$$U(f_r) = 2 \sqrt{\sum_j \left(\frac{\partial f_r}{\partial Sx_j} \right)^2 u_{Sx_j}^2}$$

Results

A good amplitude replication was achieved for the stone polished surface. The worst amplitude replication was achieved for both diamond buff and grit paper polished surfaces.

The tendency is almost the same for slope replication but the replication fidelity values were lower (see Table 1, Table 2 and Figure 3).

Table 1. Replication fidelity.

	Sq /%	Sdq /%
Diamond buff	47	33
Grit paper	56	51
Stone	95	67
Dry blast	70	50

Table 2. Replication fidelity uncertainty.

	U_{Sq} /%	U_{Sdq} /%
Diamond buff	13	16
Grit paper	7	18
Stone	11	21
Dry blast	3	7

References

- 1 H. N. Hansen, R. J. Hocken, G. Tosello CIRP Ann. - Manuf. Technol. 60 695–714 (2011).
- 2 G. Tosello, H. N. Hansen, S. Gasparin CIRP Ann. - Manuf. Technol. 58 467–72 (2009).
- 3 G. Tosello, F. Marinello, H. N. Hansen Rubber and Composites: Macromolecular Engineering 41-1 29-39 (2012).

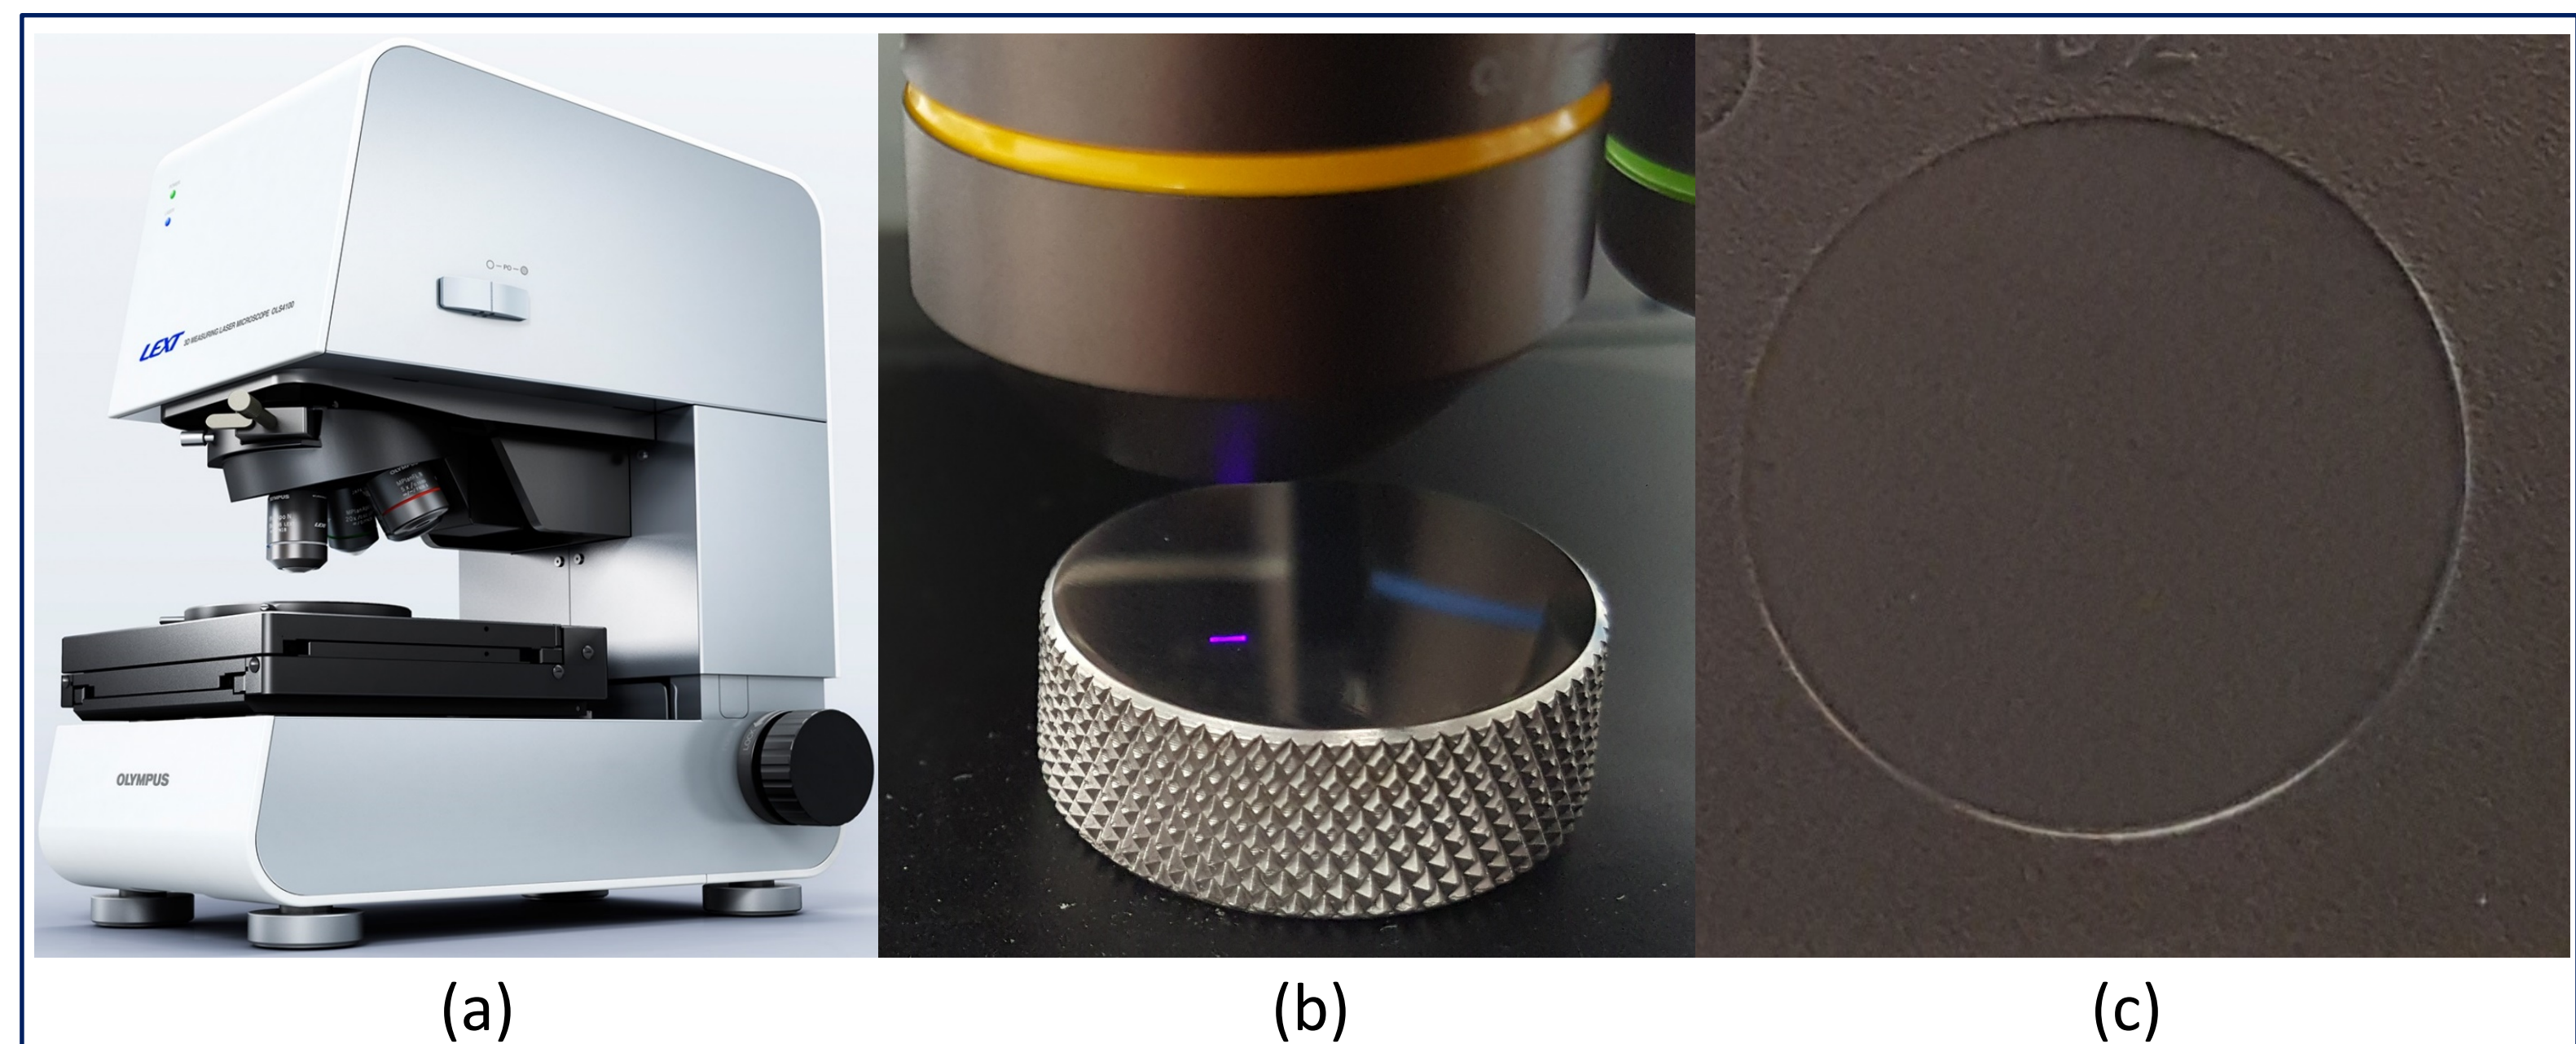


Figure 1. Metrological investigation: (a) Confocal microscope Olympus Lext. (b) Metal master polished by diamond buff. (c) Polymer replica of dry blast polished master.

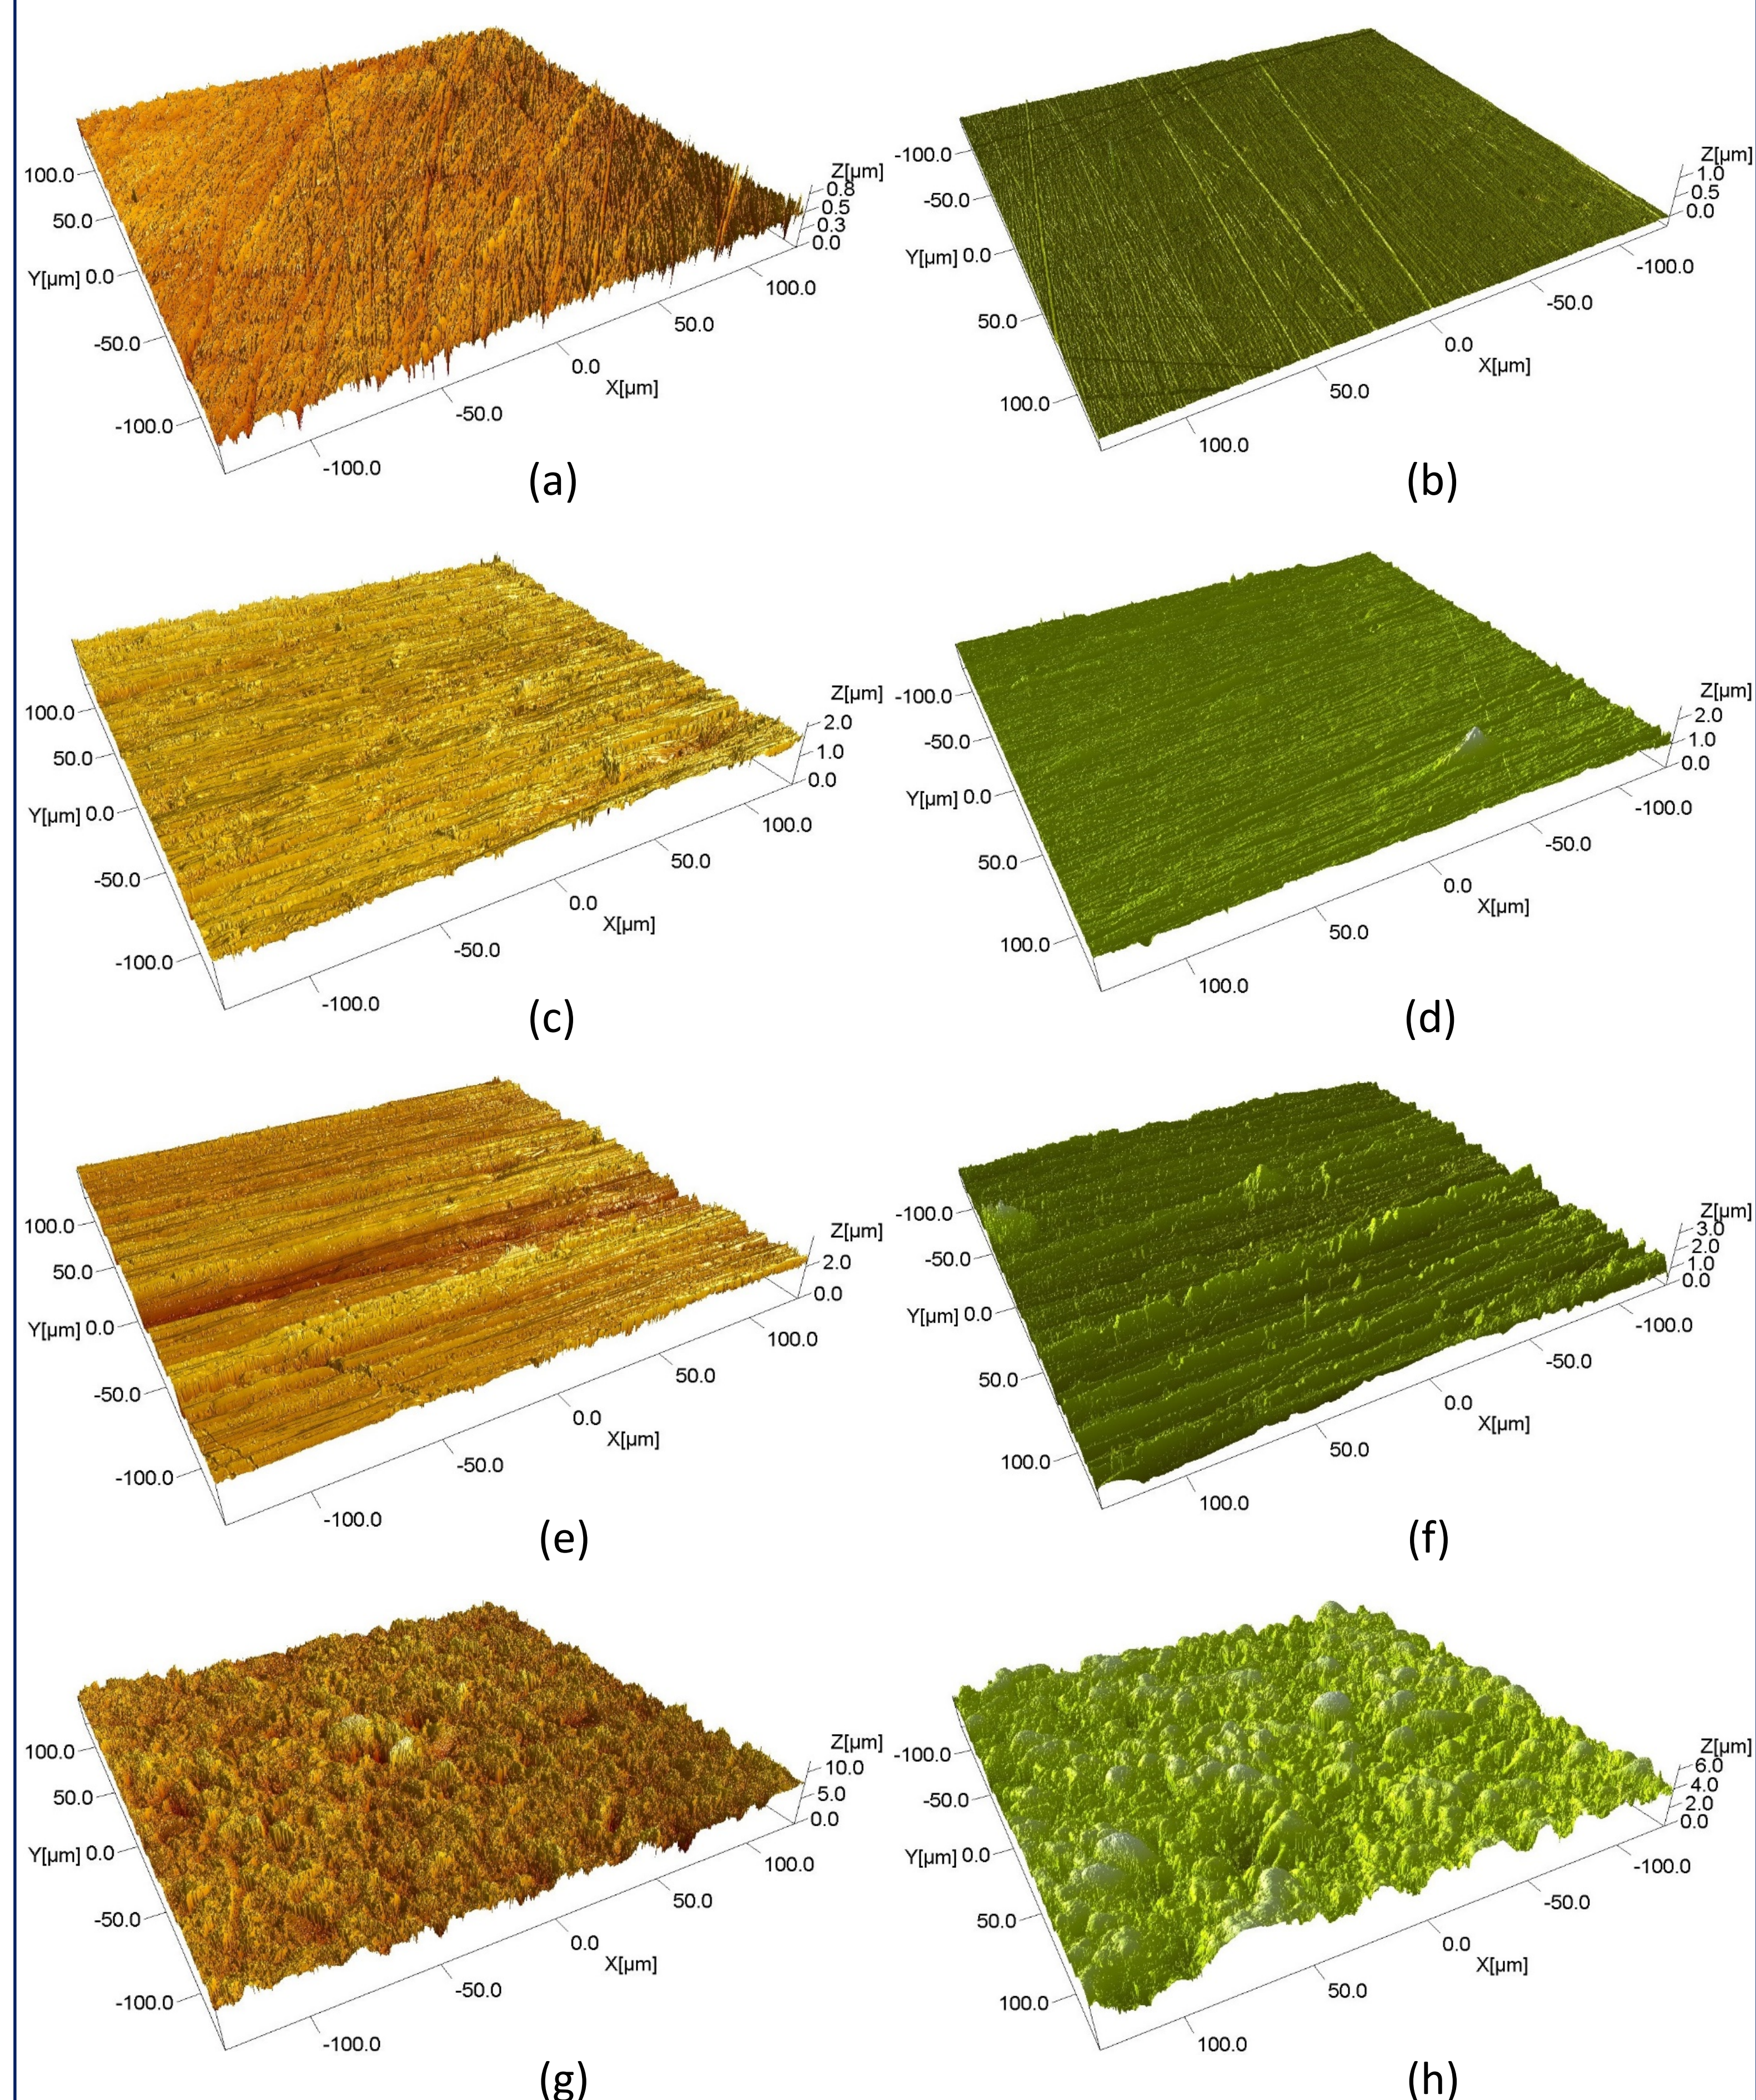


Figure 2. Examples of acquired surfaces. (a) Diamond buff polished master. (b) Replica of diamond buff polished master. (c) Grit paper polished master. (d) Replica of grit paper polished master. (e) Stone polished master. (f) Replica of stone polished master. (g) Dry blast polished master. (h) Replica of dry blast polished master.

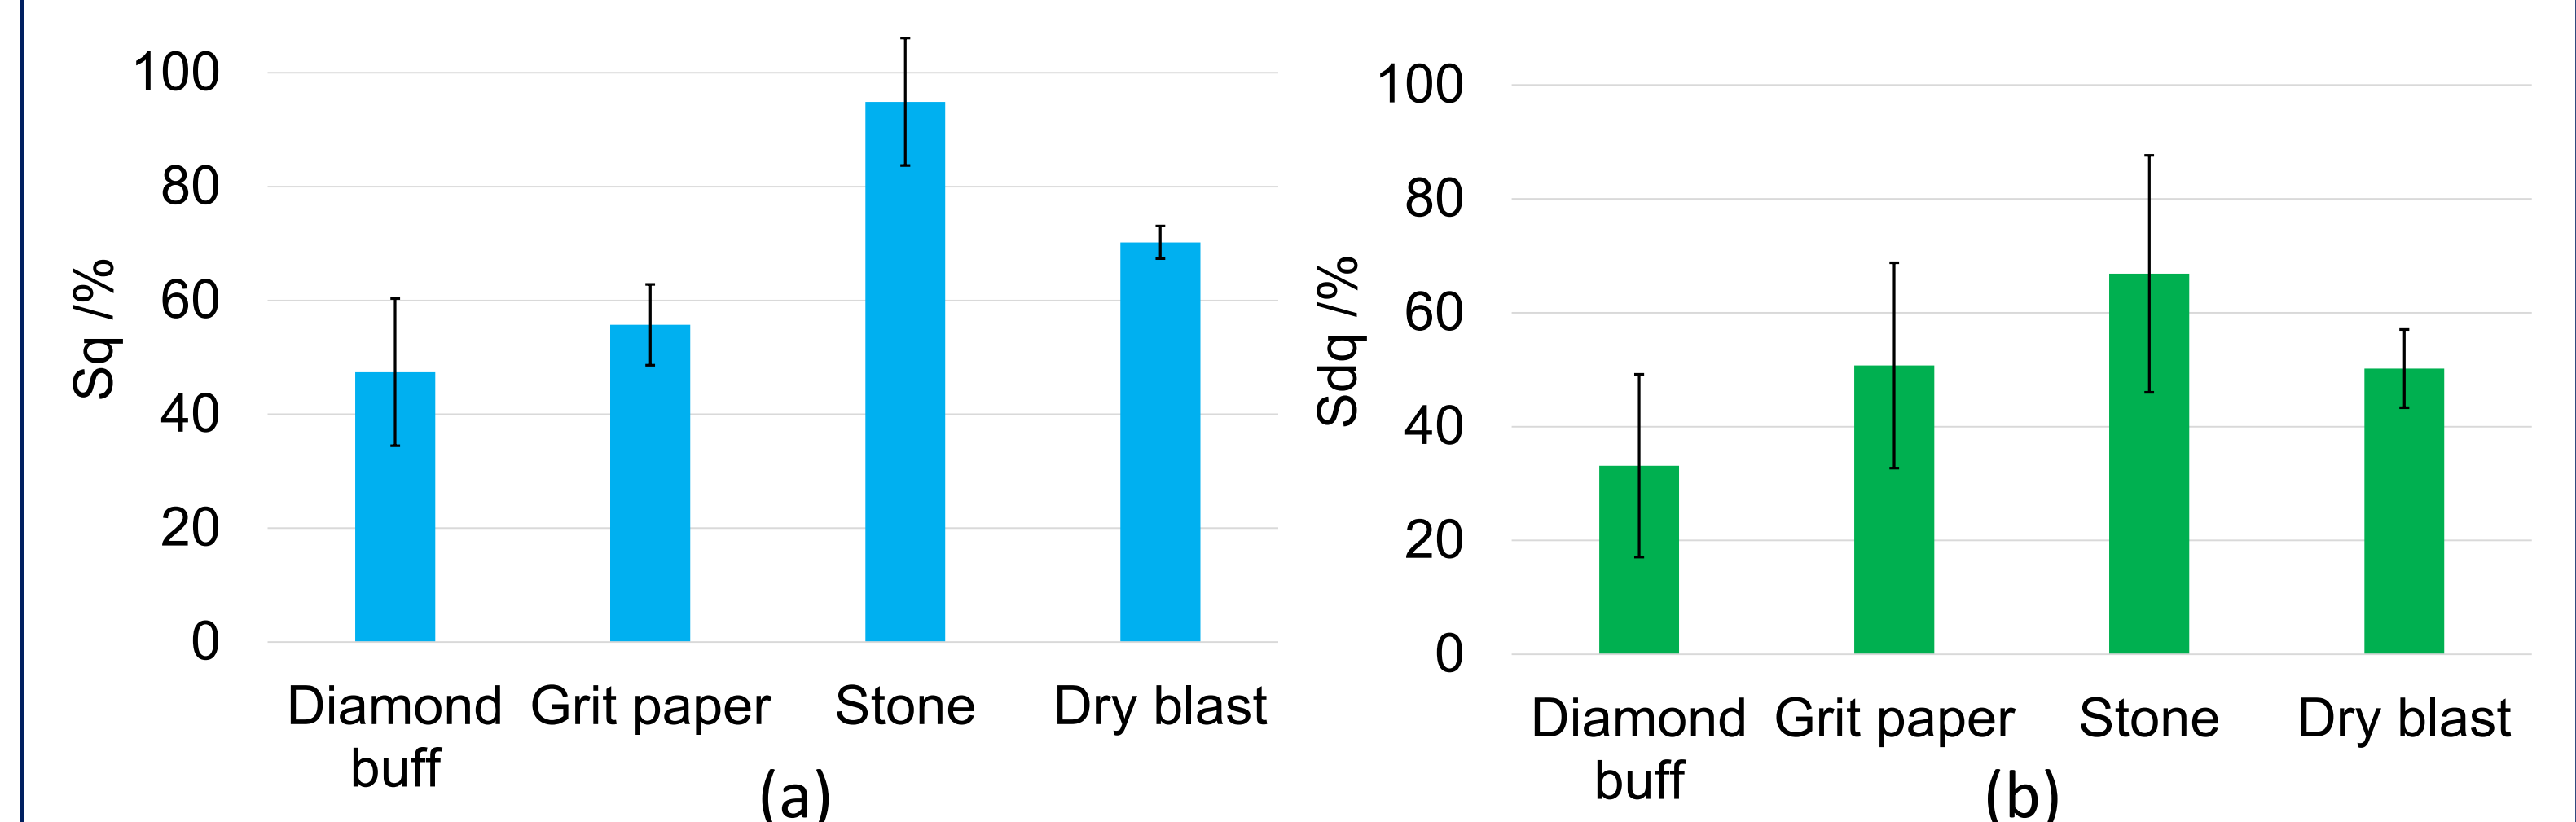


Figure 3. Replication fidelity of amplitude (a) and slope (b) for the different considered surfaces.